



XH SERIES HIGH-VOLTAGE LITHIUM BATTERY FORKLIFT

with capacity of 38,000 to 48,000kg



HANGCHA GROUP CO., LTD.

Factory site: 666 Xiangfu Road,
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755
Fax: +86-571-88926789 88132890

sales@hcforklift.com
www.hcforklift.com



Follow us on
Facebook



Follow us on
YouTube



Follow us on
WeChat



Download "Hangcha
Forklift" App



ISO45001:2018



ISO14001:2015



ISO9001:2015



HANGCHA trucks conform
to the European Safety
Requirements.

2025 VERSION 4 / COPYRIGHT 2025/12

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

The World of Hangcha



XH SERIES HIGH-VOLTAGE LITHIUM BATTERY FORKLIFT

Independently developed by Hangcha on the basis of decades of deep understanding of electric forklifts and internal combustion forklifts, XH series high-voltage counterweight lithium battery forklifts are a new series of high-voltage counterweight lithium battery forklifts that first use a new energy vehicle voltage platform and represent a breakthrough over the traditional design concept. Representing a redefinition of electric forklifts in terms of efficiency, power, reliability, etc., XH series forklift models have performance and operating condition completely superseding that of the internal combustion forklifts.

VOLTAGE

618 V

CHARGING TIME (20-100%)

1.5 Hour

VEHICLE WATER RESISTANCE

IPX4

SPEED MODELS

3 S/P/E mode
(Super/Power/Eco)

PROTECTION RATE

IP67

Stylish appearance

/ With the inherited exterior design of X series internal combustion forklifts and a smooth and sturdy profile, the whole vehicle is stylish, sturdy and powerful, showing modern industrial aesthetics.

THE *Plus*
FOR YOUR
BUSINESS



FASTER & MORE EFFICIENCY.

Fast charging makes it possible for the whole vehicle to work continuously, shortening the waiting time and greatly improving efficiency.

Through disruptive battery and fast charging technology, the charging time is greatly shortened.

LI-ION
TECHNOLOGY

6 YEARS
WARRANTY

HANGCHA provides Li-ion battery (LiFePO4) with 6 years or 12000 hours warranty.

**HIGH
VOLTAGE**
LITHIUM ION



ULTRA LONG BATTERY LIFE

- / A large-capacity lithium battery for the standard configuration can meet the long battery life need.
- / Both the drive and operating systems are efficient and energy-saving vehicle-grade permanent magnet synchronization systems.
- / High-voltage platform, less vehicle current and minimal system heat loss.
- / Braking energy recovery effectively prolongs operating time.



A double-drive motor system increases the range of high efficiency and saves energy significantly.

Advancement

A high-torque permanent magnet synchronous motor provides strong power for the vehicle with performance indicators benchmarked against that of internal combustion forklifts.

618V



A high-voltage platform with low system loss, a standard chilled water tank for heavy-duty truck to achieve good heat dissipation.



With motor, electric control and battery adopting liquid-cooling heat dissipation, the forklift can absolutely carry out long-time and high-intensity operations as internal combustion forklifts.

Braking energy recovery strategy

- / When the gear switch is in N gear or the accelerator pedal is released, the braking energy recovery function is activated, and vehicle decelerates and stops based on braking force and friction (without stepping on the foot brake), and the braking feedback current meets the allowable range of the battery.

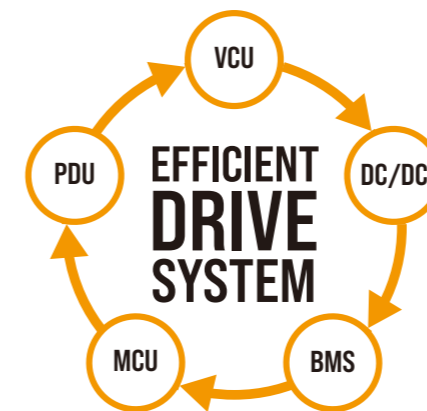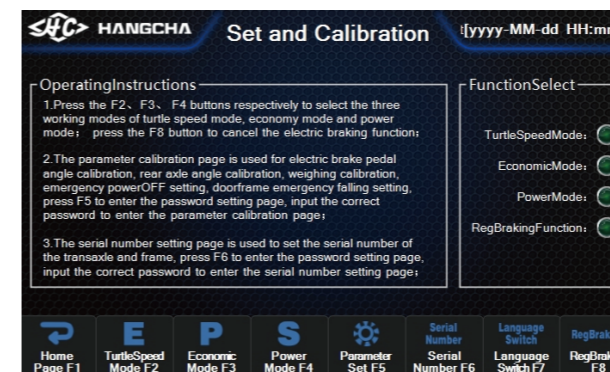

The vehicle has independently developed VCU program along with PDU+MCU+BMS+DC/DC to form a reliable and efficient drive system with flexible function configuration.



Intelligence

- / A vehicle central controller is provided, which has bus architecture, several built-in diagnosis and management functions and a central fault alarm function.
- / An optional intelligent management system is provided to enable intelligent remote monitoring and easier equipment management and logistics management.



Maintainability

- / The overturnable cab and electric tipping cylinder make tipping easier and more labor-saving.
- / The wide-opened hood and removable cover better facilitate repair and maintenance of electrical components.



SAFE AND RELIABLE

- / The cover of the vehicle is designed to be sealed to the water resistance level of IPX4.
- / The electrical system has high-voltage interlocking, insulation monitoring and potential balancing functions to offer vehicle-grade safety.



Key structural parts have been verified highly reliable by the market for many years while being used by internal combustion forklifts.



Both the battery and junction box have MSD(Manual Service Disconnect) maintenance switches to enable one-click power-down and safer maintenance.



All the motor and electronic controls reach the dust and water resistance level of IP67, a high protection level adequate to withstand harsh operating environments.



The high-voltage lithium battery is equipped with an automatic fire extinguisher for the standard configuration. The vehicle is equipped with a pipe network automatic fire extinguisher for the standard configuration.



A turning deceleration function effectively reduces risk of tipping over.



Features

| Transmission | Standard | Options |
|--|----------|---------|
| Pneumatic tyre | ● | |
| Solid tyre | | ○ |
| Steering system | | |
| Fully hydraulic power steering | ● | |
| Centralized lubrication system (machine) | | ○ |
| Automatic Lubrication System | | ○ |
| Truck | | |
| Tow pin | ● | |
| Electrostatic discharge chain | | ○ |
| Rear-view mirror on right & left mudguards | ● | |
| Separate brake oil tank | ● | |
| Operating system | | |
| Integrated joystick | ● | |
| Adjustable steering column | ● | |
| Adjustable armrest | ● | |
| Hydraulic system | | |
| Variable hydraulic pump system | ● | |
| Four-way hydraulic valve | ● | |
| Operation proportion control | ● | |
| Cab | | |
| Cabin | ● | |
| Climate control system (air-conditioning and heater) | ● | |
| Manual tilting cabin | ● | |
| Electric tilting cabin | ● | |
| Radio | ● | |
| Sunshade | ● | |
| USB charging interface | ● | |
| Clothes hanger hook | ● | |
| Reading light | ● | |
| 1 x 24V power supply | | ○ |
| 1 x 12V power supply | | ○ |
| License plate frame | | ○ |
| Fan | ● | |
| Lifting components | | |
| Duplex mast | ● | |
| Standard lifting height | ● | |
| Optional lifting height | | ○ |
| Standard fork | ● | |
| Other fork specifications | | ○ |
| Fork hook on type | | ○ |
| Hydraulic Fork Positioning | ● | |
| Independently-adjustable fork | | ○ |
| Built in Sideshift | ● | |
| Emergency descent | | ○ |
| Other | | |
| Standard color | ● | |
| User defined colour | | ○ |
| Fire extinguisher (2kg/4kg) | | ○ |
| Vehicle toolkit | ● | |
| FIMS(Fleet intelligent management system) | ● | |

| Electrical System | Standard | Options |
|--|----------|---------|
| Operator Presense System (OPS) with buzzer | ● | |
| LCD display screen | ● | |
| Main power switch | ● | |
| Emergency power off switch | ● | |
| Maintenance-free 24V lead acid battery | ● | |
| Reverse buzzer | ● | |
| High decible horn | ● | |
| LED lights (entire vehicle) | ● | |
| 2 x Working light on front mudguard | ● | |
| 2 x Front working light on top of cabin | ● | |
| 2 x Rear working light on top of cabin | ● | |
| 2 x Working light on both sides of mast | ● | |
| Reverse sensor | ● | |
| Rearview camera system | | ○ |
| Rearview camera system with memory | | ○ |
| Front & rearview camera system | ● | |
| Front & rearview camera system with memory | | ○ |
| 4 directions camera system with single display | | ○ |
| 4 directions camera recording system with single display | | ○ |
| Rear blue safety light | | ○ |
| Front and rear blue safety light | | ○ |
| Three sided blue danger zone light | | ○ |
| Overspeed alarm | | ○ |
| Speed limitation | | ○ |
| Voice reverse alarm | | ○ |
| Two-way radio | | ○ |
| Weight indicator in display | | ○ |
| Flashing warning light (non rotating) with control switch | ● | |
| Tyre pressure monitoring | | ○ |
| On-board diagnostics system | ● | |
| Water cooling system for lithium battery | ● | |
| Automatic fire suppression system | ● | |
| Automatic fire suppression system for lithium battery pack | ● | |
| Manual Service Disconnect (MSD) switch | ● | |
| High voltage interlock | ● | |
| Insulation protection | ● | |
| Power-on self-test | ● | |
| Energy recovery (braking regeneration) | ● | |
| Vehicle Control Unit (VCU) | ● | |
| Dual charging ports | ● | |
| Turning deceleration | | ○ |
| Hour meter | ● | |
| Battery charge indicator | ● | |
| Low hydraulic pressure alarm indicator | ● | |
| Hydraulic oil filter warning indicator | ● | |
| Drive mode indicator | ● | |
| Parking brake indicator | ● | |
| Service indicator | ● | |
| In cabin CCTV | | ○ |