



**HANGCHA GROUP CO., LTD.**

**Factory site:** 666 Xiangfu Road,  
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755  
Fax: +86-571-88926789 88132890

sales@hcforklift.com  
www.hcforklift.com



Follow us on  
Facebook



Follow us on  
YouTube



Follow us on  
WeChat



Download "Hangcha  
Forklift" App



ISO45001  
ISO45001:2018



ISO14001  
ISO14001:2015



ISO9001  
ISO9001:2015



HANGCHA trucks conform  
to the European Safety  
Requirements.

2025 VERSION 2/COPYRIGHT 2025/04

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



## A Series High Range Stand-on Pallet Stacker With Initial Lift

with capacities of 1,200 to 1,600kg


*The World of Hangcha*





# INNOVATIVE SOLUTIONS NEW POWER NOW

- / We use square lithium iron phosphate batteries and modules used in large quantities by commercial vehicles in mature economies.
- / The module uses an aluminum alloy frame which is sturdy, lightweight and with excellent heat dissipation.
- / Safe and effective: Charging efficiency as high as 98%, thermal runaway temperature 600 °C or above.
- / Adapted to low temperatures: Comes standard with an electrical heating feature , ensuring normal operation in low temperatures.
- / Quick charging: 2 hours full charge, economic use of each break.
- / Long-working: 4000 charging cycles, capacity retention greater than 75%.
- / Maintenance-free: Battery does not require manual maintenance.
- / Green and clean: Pollution-free, zero emissions.

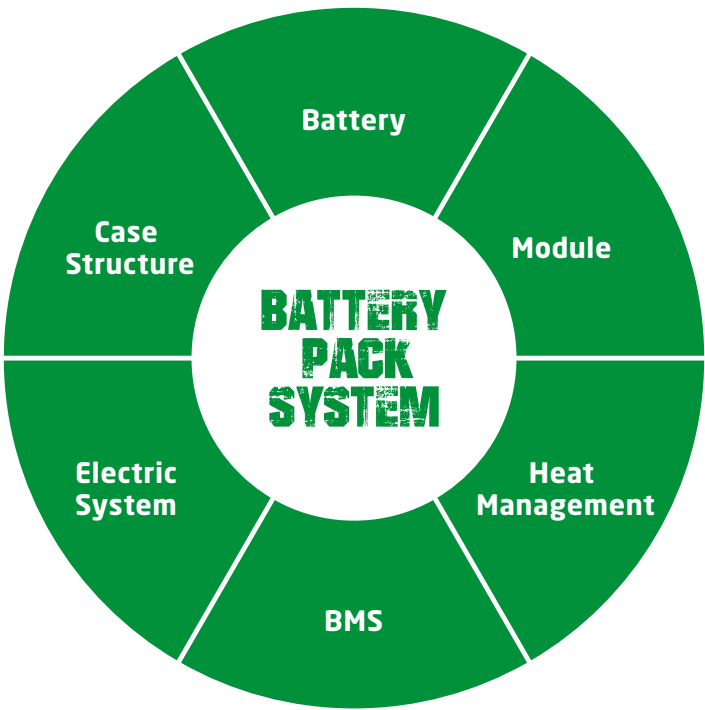

Li-Ion  
**2 hours  
100%**

Lead-acid batteries  
**8-10 hours 100%**

**Rapid charging and opportunity charging ensure continuous availability of vehicles.**

Li-Ion powered forklifts are always available. They allow for fast full charging or boost charging (100 % charge in 2 hours). They are maintenance free and do not require a battery change when used for multi-shift operations.

## Li-Ion Battery Pack specification

| Type                    |      | CDD12-AC2S-LI* | CDD14-AC2S-LI* | CDD16-AC2S-LI* |
|-------------------------|------|----------------|----------------|----------------|
| Li-Ion battery          | V/Ah | 24/125         | 24/125         | 24/125         |
| Li-Ion battery,Optional | V/Ah | 24/228         | 24/228         | 24/228         |

Note: \* CE model



HANGCHA provides Li-Ion battery (LiFePO4) with 6 years or 12000 hours warranty.

**6 YEARS  
WARRANTY**

# A Series High Range Stand-on Pallet Stacker With Initial Lift

The A Series Pallet Stacker Truck is a new product developed for warehouse and logistics applications. With the latest AC control technology, it features excellent performance, easy operation, safety and reliability, and low maintenance cost, and is an ideal vehicle for loading, unloading, and handling palletized goods in warehouse, supermarket, and workshop. The A series pallet stacker with initial lift offers better reachability with its lifting arms.

## Easy/ Efficiency/ Economy

### Appearance

- / The A series pallet stacker with initial lift is completed with specialized industrial design of appearance. The entire truck features smooth lines and affluent sense of movement, with full consideration being given to ergonomics, in accord with the latest appearance design trend.
- / It is manufactured with steel plate stamping and injection molding technologies, solid and durable, in compliance with environmental requirements.



## High Performance

- / Center stand-on driving mode and ESP(Electric Steering Power)system offer easier and more flexible operation.
- / The arm initial lifting function offers better reachability. The upper and lower double pallet handling design not only can meet requirements of stacking operation, but also brings higher material handling efficiency.
- / Lifting and lowering stepless speed regulation of the fork is a standard configuration.
- / The high efficiency traction motor realizes high driving speed and strong climbing performance.
- / The AC driving motor features excellent acceleration performance, outstanding climbing ability, low heat emission, and maintenance-free.
- / The latest ZAPI AC control system realizes accurate and stable control, and higher efficiency.
- / The CANBUS structure makes communication of the entire machine faster and more reliable.
- / Regenerative brake of the truck prevents it from sliding on a slope.
- / Hydraulic power unit, switches, plug connectors, battery condition meter, timer and other important parts are all of renowned domestic and abroad brands.

## Comfort

- / The lower vibrational pedal offers much higher driving comfort, and reduces fatigue of long-duration operation.
- / The REMA tiller made in Germany is simple but beautiful, and all operations can be done easily with one hand.
- / The tortoise speed switch with light allows the truck to move at slow speed more conveniently, and can stack goods even in confined space.
- / The optimized truck structure guarantees excellent visibility, and easy access and exit of pallet.
- / The design of narrow body with large round corners makes the truck more suitable for operation in concentrated goods shelves, and the wedge-shaped design of truck base offers much higher passing ability.
- / Different distance between fork-arms and fork length are optional, being suitable for handling of various pallets.
- / Side roll out battery can realize easy and fast replacement (optional).



Rema tiller



The integrated stamping molded guardrail offers better protection for the operator



Back cover can be opened fully, and all components and parts are clear at a glance, which is very convenient for maintenance of the entire machine



Tandem load wheel



## Reliability

- / Four-pivots and low-gravity-center design and the high-strength steel plate framed structure feature large residual load capacity, and long service life.
- / All plug connectors are imported and waterproof, and all cables have reliable protection, which increases reliability of electrical system significantly.
- / Non-contact proximity switch features long service life and reliable operation.
- / Electronic lifting limitation eliminates overflow of the hydraulic power unit, which is more energy efficient, and can protect the motor of power unit.
- / The hydraulic power unit features low noise, small vibration, and stable and reliable lifting and lowering.
- / Stamping molded fork has higher strength and impact resistance.
- / Power plug is fastened to truck body, which can avoid damage of plug when battery is replaced.
- / The battery is fixed securely, and battery cover is supported with flexible material, which reduces vibration and noise during operation.

## Safety

- / Traveling speed will be automatically reduced after fork lifting 500mm.
- / Turning speed is automatically reduced when steering.
- / Release braking, reverse braking, and three types of emergency braking can ensure safety of traveling.
- / Anti-sliding function on slope can ensure safety of operation.
- / The belly button on top of operating handle can avoid the driver from injury effectively in case of emergency during backward driving of the pallet truck.
- / The soft landing system reduces declining speed automatically when height from ground to fork is less than 100mm, which provides effective protection for goods.

## Maintenance

- / The brushless, maintenance-free AC driving motor reduces operation cost significantly.
- / The brushless, maintenance-free AC steering motor reduces operation cost significantly (optional).
- / The meter integrating battery indicator, timer, and fault self-diagnosis is convenient for maintenance.
- / All rotating shafts are equipped with lubricating sleeve and oil cup, which is convenient for maintenance and has a long service life.

## Standard specification

- / AC driving motor
- / ZAPI AC controller
- / REMA tiller
- / Imported hydraulic power unit
- / Pedal
- / Emergency power off switch
- / Multi-function battery condition meter
- / Tandem load wheel
- / Initial lift 125mm
- / Fork length 1150mm
- / Outer distance between fork-arms 570mm
- / Electronic lifting limitation
- / Soft landing system (only available for duplex mast)
- / Multi-function handle of CAN bus
- / Horn
- / Battery
- / EPS system

## Options

- / Various imported and home-made batteries
- / Different mast height (see parameter list for details)
- / Fork length 1220/1600
- / Outer distance of forks 600/680mm
- / Side roll out battery
- / Automatic battery charger
- / Load backrest
- / Mast shield
- / Lithium battery

