

HANGCHA GROUP CO., LTD.

Factory site: 666 Xiangfu Road,
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755
Fax: +86-571-88926789 88132890

sales@hcforklift.com www.hcforklift.com

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



Follow us on
Facebook



Follow us on
YouTube



Follow us on
WeChat



Download "Hangcha
Forklift" App



ISO45001:2018




ISO14001:2015



ISO9001:2015



HANGCHA trucks conform
to the European Safety
Requirements.

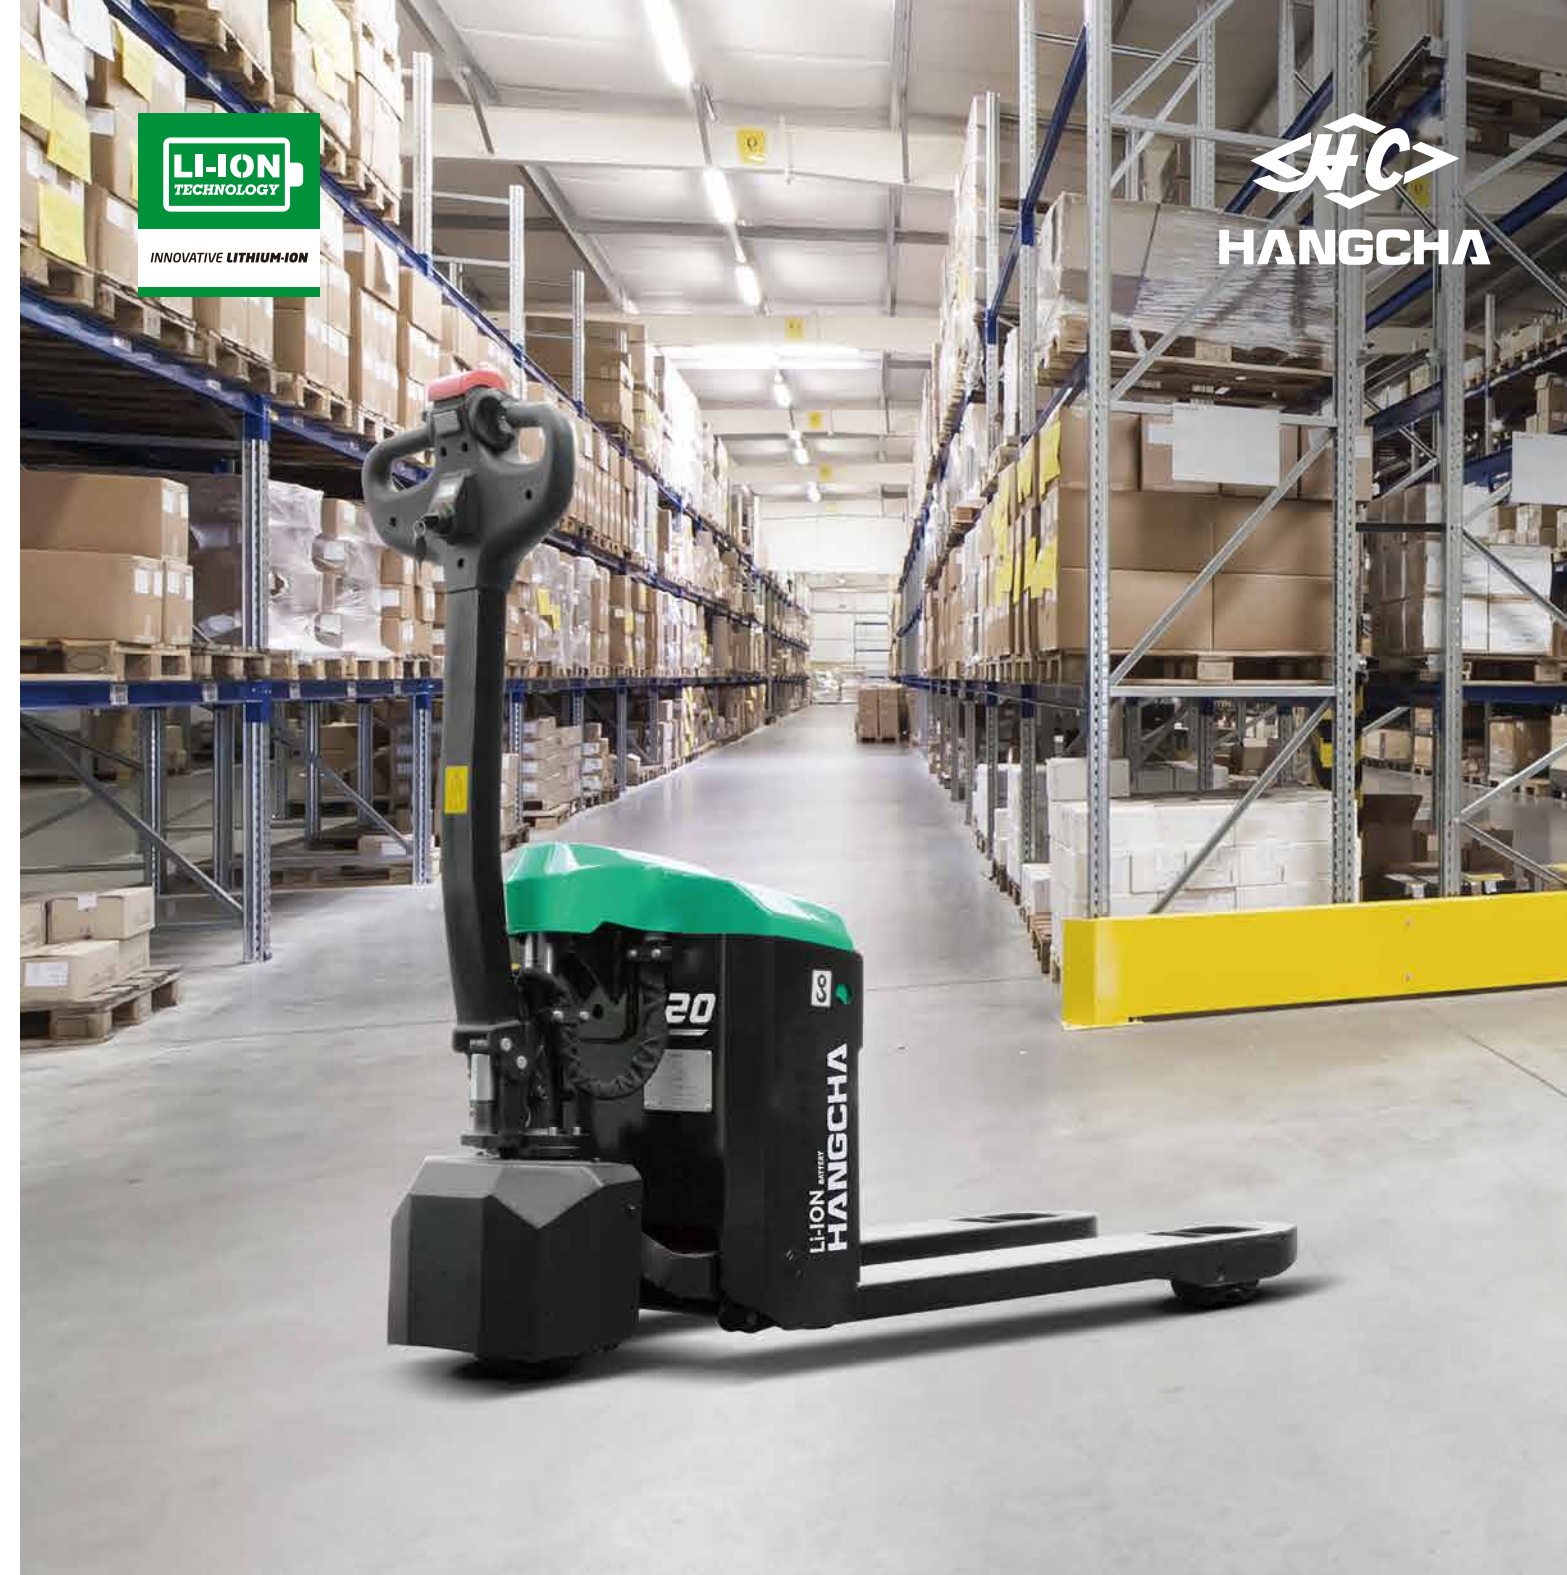

XA SERIES

MINI PALLET TRUCK

With capacity of 1,500 to 2,000kg

XA SERIES

MINI PALLET TRUCK

The XA series 1.5t-2.0t mini pallet truck is a new generation product developed by HANGCHA for warehousing and logistics applications. It adopts advanced permanent magnet brushless (PMBL) technology, offering advanced performance, comfortable operation, high reliability and safety, and low operating and maintenance costs.

Appearance

The XA series mini pallet truck features professional industrial design styling, inheriting the XA series family design concept. The vehicle features smooth and dynamic lines with a compact form factor, fully considering ergonomics and conforming to the latest design trends.

High Performance

- Powerful drive with 1.5/2.0 ton load capacity, meeting the material handling requirements of most customers.
- Permanent Magnet Brushless (PMBL) motor adopted for high performance, low heat generation, and low noise.
- Permanent magnet brushless control system for lower energy consumption.



CAN bus control handle with standard display screen for quick and convenient fault diagnosis; integrated key switch, RFID card reader or password lock with rich functionality.

5/5.5 km/h

Travel speed, laden/unladen

8/16 %

Max. gradeability, laden/unladen



SMART SOLID

Rated capacity

1.5T-2.0T



SAFETY IS OUR RESPONSIBILITY

Emergency reverse button on tiller head effectively protects operator from injury during emergency situations while traveling in reverse.

- Release braking and emergency braking functions ensure safe travel.
- Ramp anti-rollback function ensures operational safety on inclines.
- Standard electronic lift limit switch prevents impact at maximum lift height, effectively protecting the lift motor and ensuring cargo safety.




MAINTENANCE

- Permanent magnet brushless motor requires no maintenance.
- Removable hood for easy access to components; convenient overall maintenance and servicing.
- Front battery compartment panel for easy access; convenient battery removal and maintenance.
- All pivot points equipped with lubricated bushings for easy maintenance and extended service life.



RELIABILITY

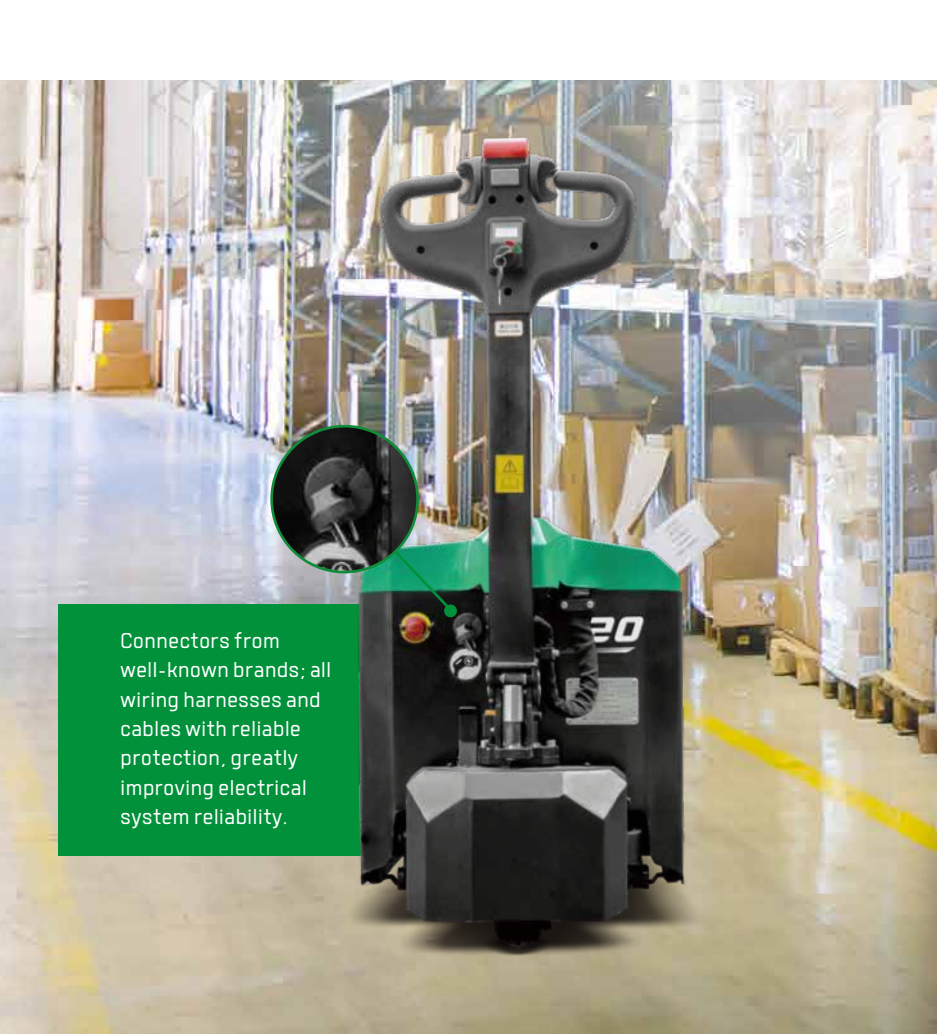

Connectors from well-known brands; all wiring harnesses and cables with reliable protection, greatly improving electrical system reliability.



Steel stamped motor hood and wheel covers for improved component reliability.



Stamped formed forks with higher strength and impact resistance; fork tip guides further improve operational efficiency.



Optimized lifting linkage design for smooth, reliable operation with reduced structural stress.

- Key switch with standard dust cover for dust, water, and oil protection, significantly improving reliability in harsh operating conditions.
- Mature and stable hydraulic power unit (HPU) with low noise, low vibration, and smooth, reliable lifting/lowering.
- Interlock switch uses non-contact proximity switch for extremely high reliability.



LI-ION
TECHNOLOGY

HANGCHA provides Li-ion battery (LiFePO4) with 3 years or 6000 hours warranty.

3 YEARS
WARRANTY

LITHIUM POWERED

EMPOWER YOURSELF WITH THE BEST



Li
Lithium

POWER THE POSSIBILITIES
RELIABLE LITHIUM-ION TECHNOLOGY

LITHIUM BATTERY ADVANTAGES



Long service life

2000 full charging cycles with at least 75% residual capacity.



Return on investment

Add flexibility to your operation, cost-saving in the long term, increased efficiencies.



Maintenance free

No topping up of water or checking acid levels.



High energy density

The high energy density of the Li-Ion battery ensures long working times and increases the high availability.



Cold area application

Li-Ion batteries maintain high performance at temperatures below freezing.



High safety and reliability

Intelligent battery management monitoring every important function, no emission of battery gasses.




Opportunity charging

Full performance during several shifts thanks to effective interim charging.

FEATURES & BENEFITS THE HANGCHA DIFFERENCE


Efficiency

By quick opportunity charging any downtime, such as a lunch break, can be efficiently used and the battery is recharged in a very short period of time. Interim charging does not affect the battery service life.

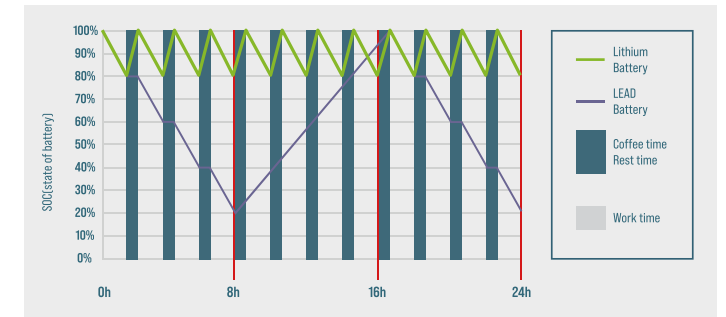

Safety

- / Intelligent battery management monitoring every important function.
- / Higher user safety, thanks to acid-free use.
- / User friendly due to avoided battery change.
- / No emission of battery gasses.

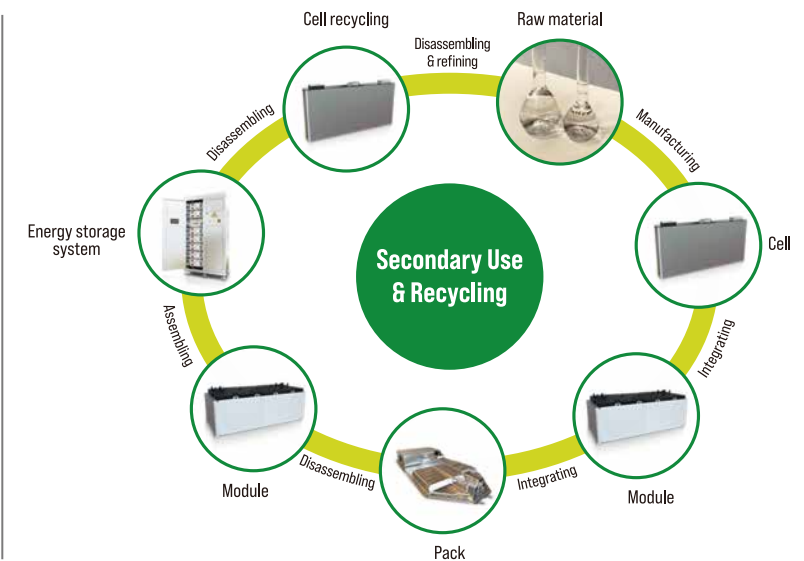

QUESTION 1

Q: What are the characteristics of lithium batteries, especially when used in high and low temperature environments?

Charging temperature: 0°C - 55°C
Discharge temperature: -20°C - 65°C
Storage environment temperature: -20°C - 55°C

After the truck key switch is closed, the instrument battery condition needs to be checked:

1. Confirm that there is no battery system alarm message on the instrument panel.
2. Please check the remaining power before use. It is recommended to use the SOC between 50% and 100%.
3. If the SOC is lower than 20%, it is not recommended to continue using it. Please charge it as soon as possible.

QUESTION 2

Q: What is the charging time and usage time calculation of forklift lithium battery?

1. Available power of lithium battery (kWh) = rated voltage * rated power * 90% (To avoid over-discharge damaging the battery, the forklift is equipped with low power protection (less than 10%)).
 2. Charging time (h) = rated capacity of lithium battery (Ah) * 90% * charger output current (A).
 3. The power consumed for charging (kWh) = the available power of the lithium battery * 93% (the charging efficiency of the charger is calculated as 93%).
 4. Usage time (h) = available power of lithium battery * energy consumption data.
- For specific energy consumption values, please refer to the technical table on the sharing platform.**

QUESTION 3

Q: How does Hangcha BMS work to ensure the safety of the lithium battery?

HANGCHA BMS (battery management system) can monitor the cells at all times. As a result, hangcha lithium power is the reliable solution.



Battery Safety Management:

Overcharge/over discharge protection
Overcurrent/over-temperature/low-temperature protection
Multi-level fault diagnosis protection
Double fault monitoring



Battery Parameter Detection:

Battery voltage detection and analysis
Battery current detection and analysis
Battery temperature detection and analysis



Equilibrium Management:

Equalization based on voltage mode
Equalization based on time mode
Equalization based on battery cell SOC
Active/passive equalization optional



Other Features:

Low cost, low power consumption
Historical data record
Flexible cascade expansion
CRC data validation