

Factory site: 666 Xiangfu Road, Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755 Fax: +86-571-88926789 88132890

sales@hcforklift.com www.hcforklift.com

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



Facebook

IS045001:2018



IS014001:2015





Follow us on

Forklift" App

Download "Hangcha



HANGCHA trucks confit to the European Safeti





HIGH **PERFORMANCE**

Electric power steering

Provides smooth operation, quick response, and excellent steering control.

Ac drive motor

Delivers superior acceleration, excellent climbing ability, low heat generation, and is brushless and maintenance-free.

Ac electric control system




Equipped with a multi-functional multiple modes for different real-time operational parameters and allows authorized parameter adjustments.

Battery



Standard side roll out design for easy replacement.

Energy recovery











Foldable seat

Supports both standing and sitting operation modes, ideal for long-distance transportation.

Knee protection pad

Enhances safety and comfort during seated operation.

Precision steering Feedback

Provides a smooth driving experience with torque feedback.







Convenient handgrip


Facilitates easy boarding.



Instrument panel

Includes wheel position display for better directional control.



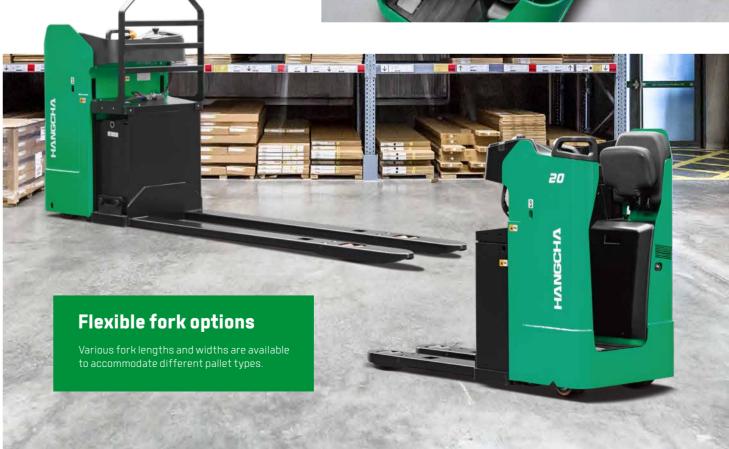

RELIABILITY



Robust Frame design

High-strength structure ensures durability under various working conditions.



Optimized Mast design


Ensures smooth and reliable lifting with minimal stress.



Waterproof Electrical components

All wiring and connectors are protected, enhancing the reliability of the electrical system.



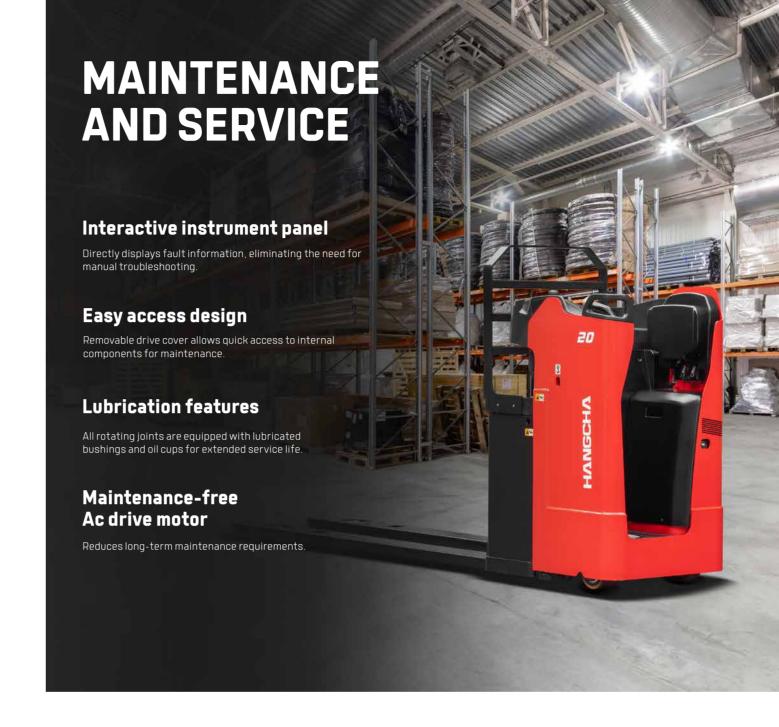



Braking systems

Features release braking, foot-operated braking, and emergency braking for enhanced safety.




Electronic lifting limitation

Avoids impact at the top of the lift, protecting both the motor and cargo.





LITHIUM POWERED

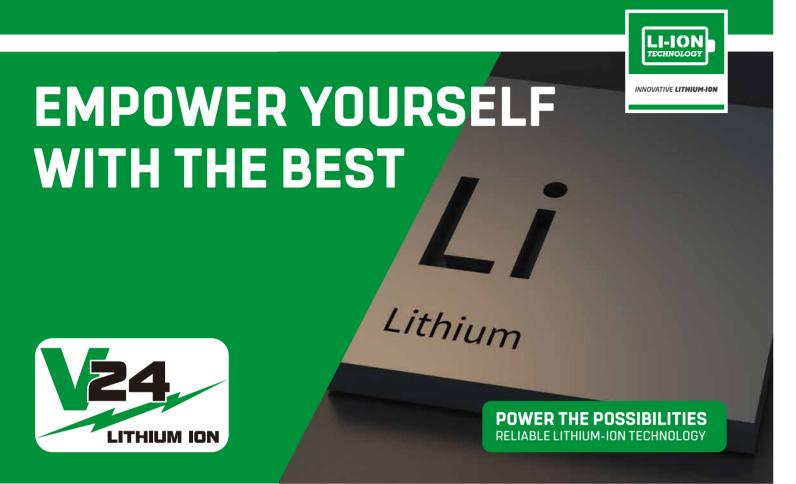

LITHIUM BATTERY ADVANTAGES



Long service life

4000 full charging cycles with at least 75% residual capacity



Return on investment

Add flexibility to your operation, cost-saving in the long term, increased efficiencies.



Maintenance free

No topping up of water or checking acid levels.



High energy density

The high energy density of the Li-lon battery ensures long



Cold area application

Li-lon batteries maintain high performance at temperatures



High safety and reliability

Intelligent battery management monitoring every important function, no emission of battery gasses.



Opportunity charging

Full performance during several shifts thanks to effective interim charging.




working times and increases the high availability.

FEATURES & BENEFITS THE HANGCHA DIFFERENCE

Efficiency

By quick opportunity charging any downtime, such as a lunch break, can be efficiently used and the battery is recharged in a very short period of time. Interim charging does not affect the battery service life.

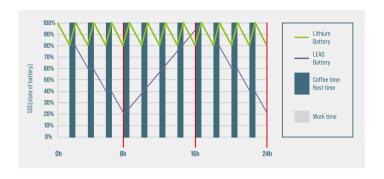

Safety

- / Intelligent battery management monitoring every important function.
- / Higher user safety, thanks to acid-free use.
- / User friendly due to avoided battery change / No emission of battery gasses.





Q: What are the characteristics of lithium batteries, especially when used in high and low temperature environments?

Charging temperature -30 0 -55 0 Discharge temperature: -30°C -65°C Storage environment temperature:

After the truck key switch is closed, the instrument battery condition needs to be checked:

- 1. Confirm that there is no battery system alarm message on the instrument panel 2. Please check the remaining power before use. It is recommended to use the SOC between 50% and 100%.
- 3 If the SOC is lower than 20% it is not recommended to continue using it Please charge it as soon as possible



Q: What is the charging time and usage time calculation of forklift lithium battery?

- 1. Available power of lithium battery (kWh) = rated voltage × rated power × 90% (To avoid over-discharge damaging the battery, the forklift is equipped with low power protection (less than 10%)).
- 2. Charging time (h) = rated capacity of lithium battery (Ah) × 90% ÷ charger output current (A).
- 3. The power consumed for charging (kWh) = the available power of the lithium battery + 93% (the charging efficiency of the charger is calculated as 93%). 4. Usage time (h) = available power of lithium battery + energy consumption data. For specific energy consumption values, please refer to the technical table on the sharing platform.



O: How does Hangcha BMS work to ensure the safety of the lithium battery?

HANGCHA BMS (battery management system) can monitor the cells at all times. As a result, hangcha lithium power is the reliable solution



Battery Safety Management:

Overchange / over dischange protection Overcurrent/over-temperature/low-temperature protection Multi-level fault diagnosis protection Double fault monitoring



Battery Parameter Detection:

Battery voltage detection and analysis Battery current detection and analysis Battery temperature detection and analysis




Fauilibrium Management

Equalization based on voltage mode Equalization based on time mode Equalization based on battery cell SOC Active/passive equalization optional



Other Features:

Low cost, low power consumption Historical data record Flexible cascade expansion CRC data validation

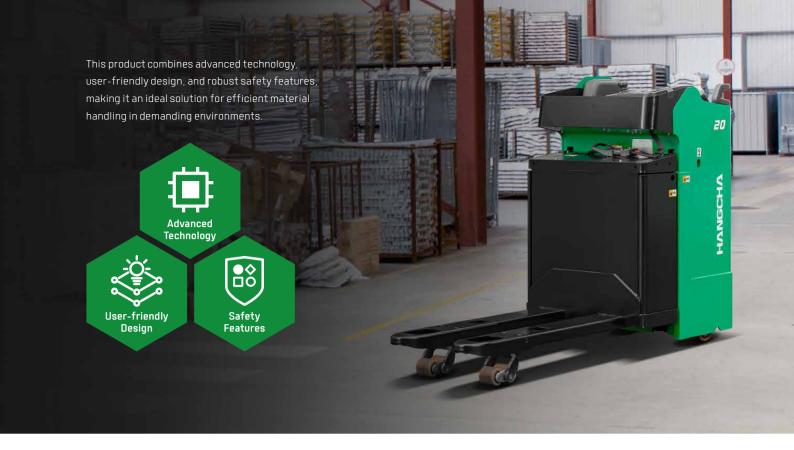

Features

| Truck | Standard | Options |
|----------------------------------|----------|---------|
| 24V AC Drive Motor | • | |
| Electric Steering | • | |
| Polyurethane Wheels | • | |
| Fork Length: 1150 mm | • | |
| Fork Outside Width: 540 mm | • | |
| Electronic Lifting Limitation | • | |
| Fixed Support Wheel | • | |
| Dual Load Wheels | • | |
| USB Power Supply | • | |
| Turning Deceleration | • | |
| Multi-Layer Footplate Cushioning | • | |
| Knee Protection Pad | •_ | |
| Side-Removable Battery | • | |
| Boarding Handgrip | • | |
| Folding Seat | • | |
| Fork Length: 2400 mm | | 0 |
| Fork Outside Width: 680 mm | | 0 |
| Load backrest | | 0 |
| Packaging Film Holder | | 0 |
| Controls and instruments | | |
| Controller | • | |
| Hydraulic Power Unit | • | |
| Interactive Meter | • | |
| Standing Footplate Switch | • | |
| Key Switch | • | |
| PIN code Access | | 0 |
| Safety | | |
| Horn | • | |
| Electromagnetic Brake | • | |
| Beeper | | 0 |
| Lights | | |
| Blue Light | | 0 |