

HANGCHA GROUP CO., LTD.

Factory site: 666 Xiangfu Road, Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755 Fax: +86-571-88926789 88132890

sales@hcforklift.com www.hcforklift.com











Facebook

YouTube


IS014001:2015


Forklift" App





 ${\sf HANGCHA\,GROUP\,CO}, {\sf LTD}. \, {\sf reserves} \, {\sf the\, right\, to\, make\, any\, changes} \, {\sf without\, notice\, concerning}$ colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

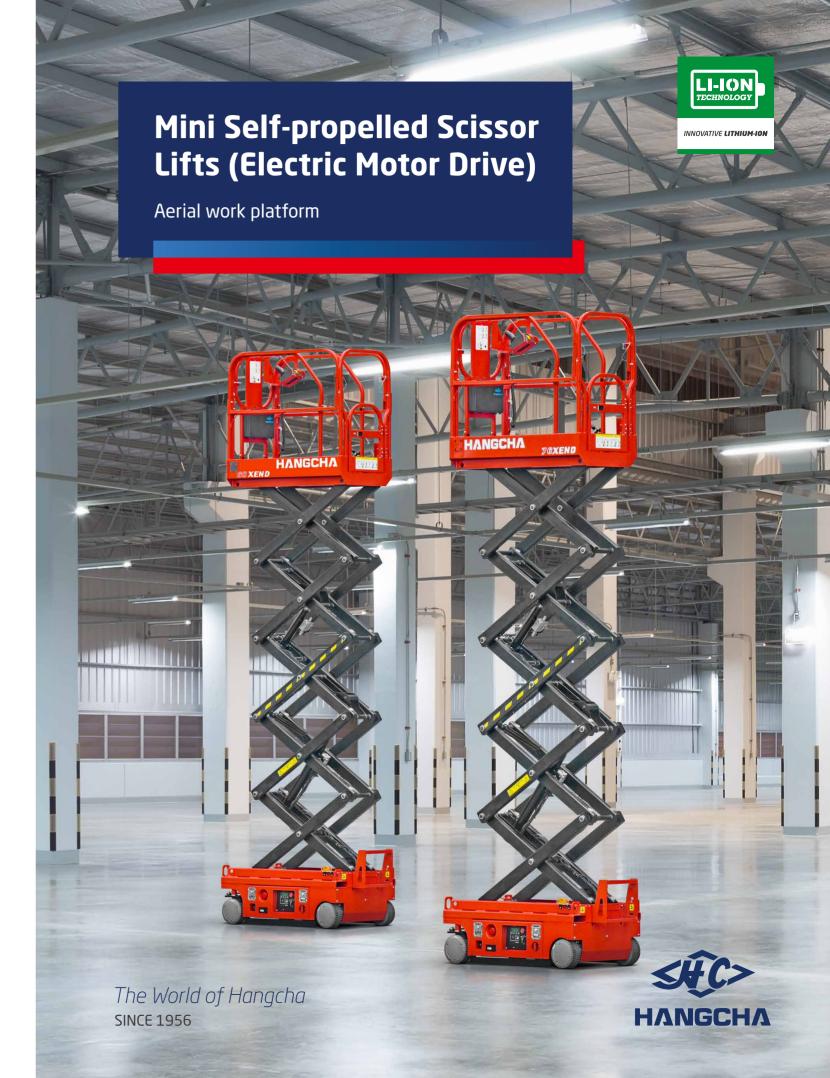

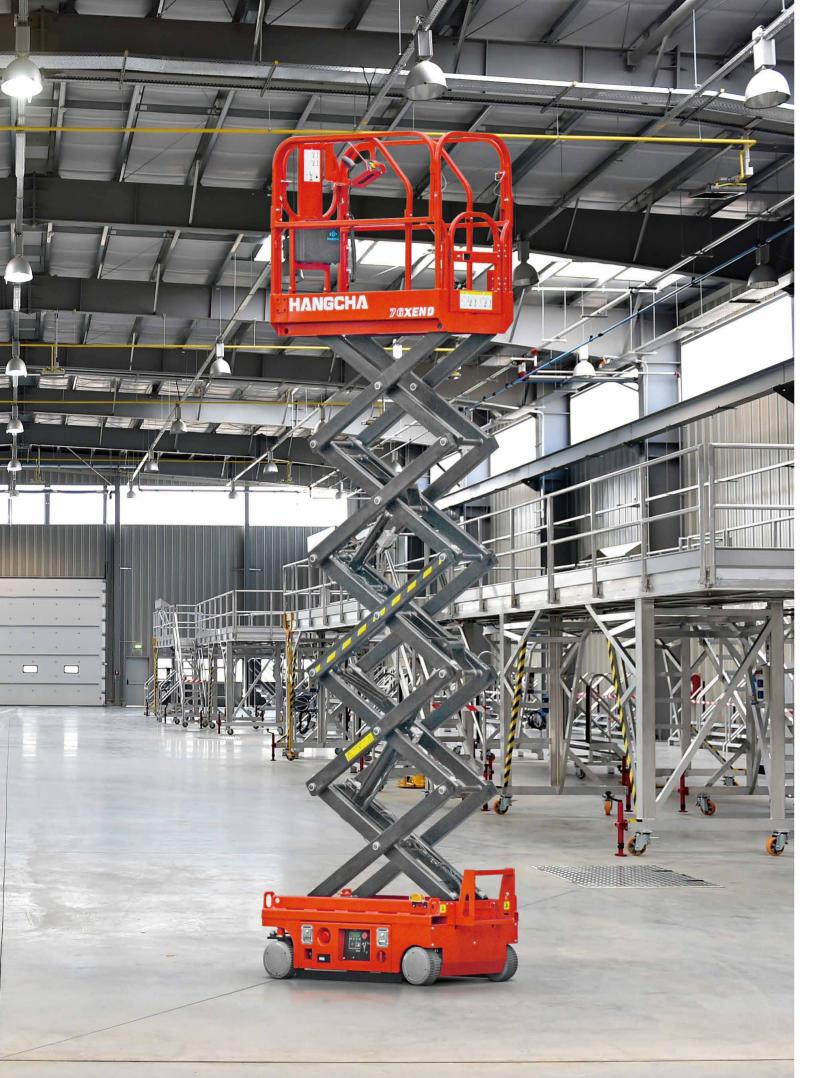

# Designed to be used in buildings

/ The working height can perfectly adapt to the needs of building working.

#### Mini Size

/ The compact size makes the machine gets into the elevator with free access.

## **Light Weight**

/ The weight is very light, which can meet the load limit of elevator and better protect the ground.

## **Large Capacity**

/ Though the self-weight is light, it has a large capacity, the machine can allow two peoples working together.

## **High Efficiency**

/ Equipped with efficient fully electrified DC drive system, more durable.

#### **Low Failure Rate**

/ Simple and clear system, drawer structure, easier maintenance, lower use cost.

# **High Rewarding**

/ Transport and procurement costs are lower, and rental prices are comparable to regular models.

#### **Green Environment Protection**

/ Electric drive walking system, zero emission, low noise, more suitable for indoor use.



ontrol system



Motor and brai



Explosion proof valve, To prevent the machin



Extension platfo



The parts are well located





Anti-overturning system, When the machine raises to more than 2m, this system will work automatically, to protect the machine from overturning while walking at un-leveling ground



Manual lowering handle, When the operation system failed or the battery power is too low to let the platform decline, we can use this handle to lower the machine



LCD screen, used to display fault code and adjust parameters



Supporting arms,To protect the operator when he is doing repair or maintenance job

